





In nature,  
nothing is perfect  
and everything  
is perfect.  
Trees can be  
contorted,  
bent in weird  
ways, and they're  
still beautiful.

(Alice Walker)

**IT** *In natura niente è perfetto e tutto è perfetto.  
Gli alberi possono essere contorti, incurvati in modi  
bizzarri, ma risultare comunque bellissimi.*

# overview

## INTRO

- 6** index by family
- 7** index by mounting
- 8** company profile

## PRODUCTS

- 24** calib
- 32** duvali
- 42** idria
- 52** kalan
- 64** solisia
- 82** zygo

## INFO

- 92** how to read the catalogue
- 94** family abacus
- 94** index by code
- 95** general information
- 95** symbols
- 96** quality certifications
- 97** terms & conditions

# index by family

## CALIB



28  
calib

## DUVALI



36  
duvali\_mini

38  
duvali

## IDRIA



46  
idria

48  
idria

## KALAN



56  
kalan 550

58  
kalan 900

60  
kalan 1450

56  
kalan 550

58  
kalan 900

60  
kalan 1450

## SOLISIA



68  
solisia 130

76  
solisia 200

72  
solisia 130

78  
solisia 200

## ZYGO



86  
zygo

# index by mounting

## CEILING LAMPS

56 kalan 550

58 kalan 900

60 kalan 1450

## WALL LAMPS

46 idria

56 kalan 550

58 kalan 900

60 kalan 1450

68 solisia 130

76 solisia 200

## BOLLARDS

28 calib

36 duvali\_mini

38 duvali

48 idria

72 solisia 130

78 solisia 200

86 zygo



**IT** *Soddisfare le esigenze di produzione senza compromettere la capacità delle generazioni future di fare lo stesso. Questa è la filosofia green di [LND] lighting e del Gruppo Bugatti.*

Meeting production needs without compromising the ability of future generations to do the same.

This is the green philosophy of [LND] lighting and the Bugatti Group.

**Being green: a major theme in today's society.**

The concept of sustainability brings us back to an **awareness** of the world we live in. To the need to have a **common goal**, something to aspire to, acting with the best of intentions and respect for others. A goal that unites society and makes it better for everyone.

In [LND] Lighting, for example, **sustainability** means being able **to meet production needs without creating a negative impact on the ecosystem we all inhabit**. Thus enabling the next generations to do the same.

For a continuous and careful evolution: part of a **common future**.

**IT** *Essere green: uno dei temi portanti nella società di oggi.*

*Il concetto di ecosostenibilità ci riconduce alla **consapevolezza** nei confronti del mondo in cui viviamo. Alla necessità di avere un **obiettivo comune**, un qualcosa a cui aspirare, agendo con i migliori intenti e nel rispetto degli altri. Un obiettivo che accomuna la società e la rende migliore, per tutti.*

*In [LND] Lighting, per esempio, **sostenibilità** significa riuscire a **soddisfare le esigenze produttive senza creare un impatto negativo sull'ecosistema che tutti noi abitiamo**. Permettendo, così, alle generazioni successive di poter fare lo stesso. Per un'evoluzione continua e attenta: parte di un **futuro comune**.*

**36,94%**

renewable energy used  
energia rinnovabile utilizzata

**805.470,42 kg**

CO<sub>2</sub> emissions avoided in one year  
emissioni di CO<sub>2</sub> evitate in un anno

**317,77 tep**

tonnes of oil equivalent saved in one year  
tonnellate equivalenti di petrolio risparmiate in un anno

**1.699.304,69 kWh**

energy produced in one year by the hydroelectric plant  
and photovoltaic solar panels

energia prodotta in un anno dalla centrale idroelettrica  
e dai pannelli solari fotovoltaici

**&CO/LLECTION is the new range of products made in [LND].**

They originate from the wish to **find a new place for light in its natural environment: nature.** With awareness, we have maintained all the bio-  
aspect features of the materials to be able to give you a new anthology of organic light.

It is for this very reason that, in this collection, you will never find aesthetically perfect products, with an icy cold, industrial look. For this reason we have taken the names of this collection from the Cactus family. The beauty of this variety of plants is that although they are all very similar, due to their thorns, aesthetic conformation and properties, they are always different from each other in shape and size.

**Uniqueness in diversity has been our design leitmotiv.**

# & CO / LLECTION

**IT\_ &CO/LLECTION è la nuova gamma di prodotti made in [LND].**

*Nasce dalla volontà di **ri-collocare la luce nel suo ambiente naturale: la natura.** Con coscienza, abbiamo mantenuto tutte le caratteristiche di bio-aspetto dei materiali per potervi dare una nuova antologia di luce organica.*

*Proprio per questo motivo non troverete mai, in questa collezione, prodotti esteticamente perfetti, dall'aspetto algido e industriale. Per questo motivo abbiamo preso a piene mani i nomi di questa collezione dalla famiglia delle Cactacee. Il bello di queste varietà di piante è che pur essendo tutte molto simili, per via delle spine, della conformazione estetica e delle proprietà, sono sempre diverse l'una dall'altra per forma e dimensioni.*

**L'unicità nella diversità è stato il nostro leitmotiv di progettazione.**







# HIGH LUMINOUS EFFICIENCY AND VISUAL COMFORT

[ALTA EFFICIENZA LUMINOSA E COMFORT VISIVO]



# DESIGN, POWER AND TECHNOLOGY

[DESIGN, POTENZA E TECNOLOGIA]

[MASSIMA RESISTENZA]

# MAXIMUM DURABILITY





In the world does one human being exist who is identical to another? One animal the same as its nearest brother? We have listened to Nature and it has described for us, once again, that **one is unique** thanks to its anomalies.

So, the lesson transfers itself to non-mass and non-industrial production. For [LND] **uniqueness, originality** and care for details are, precisely what makes the **&CO/LLECTION** extraordinary. All that's left to do is to release the [LND] products into their &CO/system.



Imper-  
fection  
is our  
note  
of per-  
fection.

**IT** *L'imperfezione è la nostra nota di perfezione.*

*Esiste al mondo un essere umano uguale all'altro? Un animale uguale al suo più prossimo fratello? Abbiamo ascoltato la Natura e ci ha descritto, ancora una volta, che **uno è unico** grazie alle sue anomalie.*

*La lezione si trasferisce così alla produzione non in serie, non industriale. Per [LND] Sono per l'appunto **l'unicità, l'originalità** e la cura dei dettagli a rendere la famiglia **&CO/LLECTION** straordinaria. Non resta che liberare i prodotti [LND] nel loro &CO/sistema.*



# wood to change the world



Accoya® timber is produced by Accsys in its factory in Arnhem in the Netherlands. Accsys transforms certified sustainable, fast growing timber into Accoya® through its proprietary acetylation process.

**IT** *Legno per cambiare il mondo*

Il legno Accoya® è prodotto da Accsys nel suo stabilimento di Arnhem, nei Paesi Bassi. Accsys trasforma il legno sostenibile certificato a crescita rapida in legno Accoya® attraverso il suo processo di acetilazione proprietario.

25 year warranties  
Garantito per 25 anni

Highly stable  
Eccezionale stabilità

Highly durable  
Eccezionale durabilità

Long service life  
Lunga vita utile

Low maintenance  
Bassa manutenzione

Natural wood  
Legno naturale

Sustainably sourced  
Provenienza sostenibile


Non toxic  
Non tossico

Low environmental impact  
Basso impatto ambientale

100% Recyclable  
100% riciclabile

Accoya® is the truly sustainable choice which helps respond to global challenges such as climate change. Accredited by the FSC® and Cradle to Cradle Gold™ certified, it is the only construction material in the world to obtain **C2C Platinum™ certification** for the health of materials. With a low carbon footprint it can contribute to decreasing carbon emissions for a healthier world. It is also non-toxic, therefore safe for people and pets and for the planet.

**IT** *Accoya® è la scelta veramente sostenibile che aiuta a rispondere alle sfide globali come il cambiamento climatico. Accreditato dall'FSC® e certificato Cradle to Cradle Gold™, è l'unico materiale da costruzione al mondo a ottenere la certificazione C2C Platinum™ per la salute dei materiali. Con una bassa impronta di carbonio si può contribuire a diminuire le emissioni di carbonio per un mondo più sano. È anche atossico, quindi sicuro per le persone e gli animali domestici e per il pianeta.*

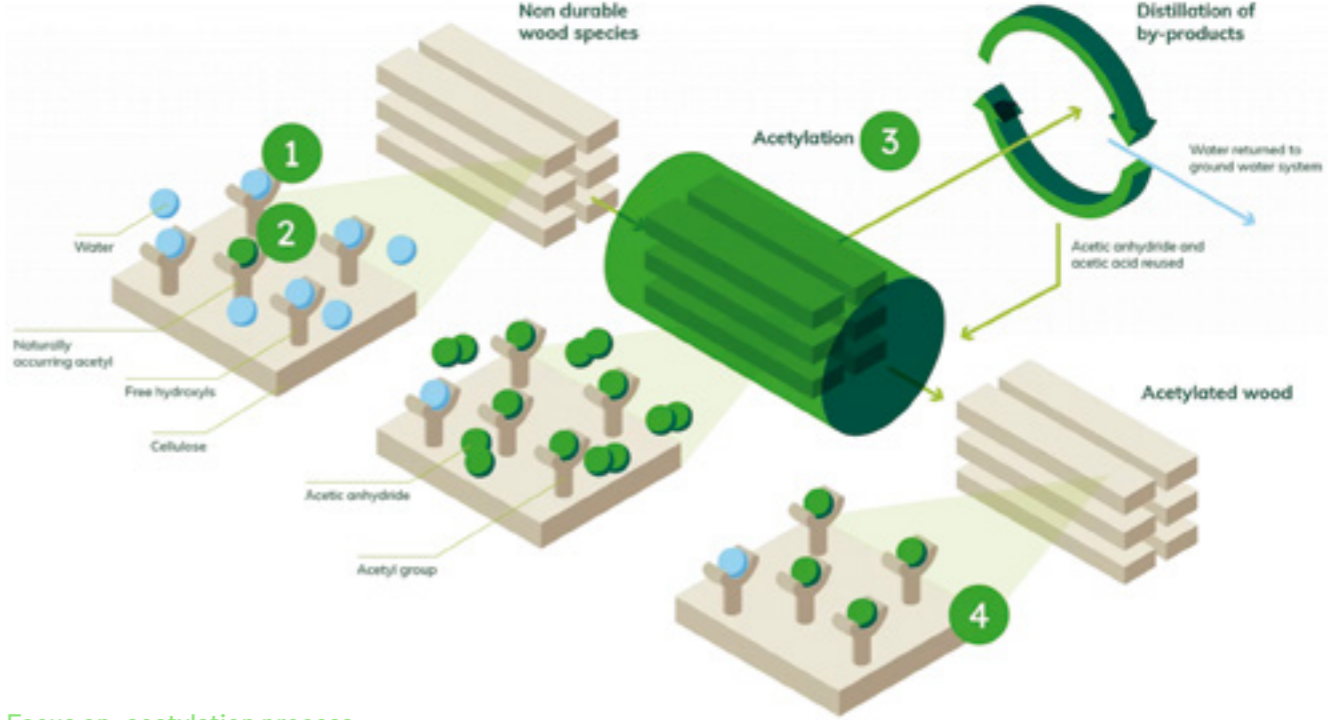

**Focus on: acetylation process.**

Acetylation applies a **modification at molecular level** which changes the structure of the timber itself, **improving many of its performance characteristics**, above all natural durability and dimensional stability.

Modification of the timber (chemical, thermal or impregnation) such as acetylation, improves the physical, mechanical or aesthetic properties of timber. This process produces a **material which can be disposed** of at the end of the life cycle of a product **without presenting greater environmental risks** than those associated to the disposal of natural timber.

**IT** *Focus on: processo di acetilazione.*

L'acetilazione applica una **modifica a livello molecolare** che cambia la struttura del legno stesso, **migliorando molte delle sue caratteristiche prestazionali**, soprattutto la durabilità naturale e la stabilità dimensionale.

La modifica del legno (chimica, termica o impregnazione) come l'acetilazione, va a migliorare le proprietà fisiche, meccaniche o estetiche del legno. Questo processo produce un **materiale che può essere smaltito** alla fine del ciclo di vita di un prodotto **senza presentare rischi ambientali** maggiori di quelli associati allo smaltimento del legno naturale.



Accoya® offers a reliability without precedents for timber.

It is monitored and reliable,  
 it **does not swell, does not shrink**  
 and **does not visibly distort**.  
 Highly durable, it resists the test  
 of any climate.

And moreover, it remains unchanged:  
 a **guarantee of 25 years underground or fresh water**.

**IT** Accoya® offre un'affidabilità senza precedenti per il legname.

È controllato e affidabile **non si gonfia, non si ritira e non si distorce** visibilmente. **Altamente durevole**, resiste alla prova di qualsiasi clima. E per di più, rimane tale: **una garanzia di 25 anni sotto terra e in acqua dolce**.

**Guaranteed for 25 years underground and in fresh water.**

Accoya® timber has been accurately tested for dimensional stability, duration, paint retention and terrain conditions to guarantee optimal performances. In fact, it is so reliable that for many years it has been and continues to be used by scientists as a reference point with respect to which other treatments and modified timbers are measured.

With a **guarantee of 25 years** in underground or fresh waters why choose anything else? Accoya® timber is not palatable to a wide range of parasites and constitutes an effective barrier against attacks by insects.



**IT** 25 anni garantiti a terra o in acqua dolce.

Il legno Accoya® è stato accuratamente testato per stabilità dimensionale, durata, ritenzione della vernice e condizioni del terreno per garantire prestazioni ottimali. In effetti, è così affidabile che per molti anni è stato e continua ad essere utilizzato dagli scienziati come punto di riferimento rispetto al quale vengono misurati altri trattamenti e legni modificati.


Con una **garanzia di 25 anni** in acque sotterranee o dolci perché scegliere qualcos'altro? Il legno di Accoya® non è inoltre appetibile ad un'ampia gamma di parassiti e costituisce un'efficace barriera contro gli attacchi degli insetti.





# PRODUCTS RANGE

  
[bollards]

  
[wall & ceiling lamps]



**&CO/LLECTION**



FOR A GREEN SCENARIO.

[PER UNO SCENARIO GREEN.]



# calib

The perfection of light in a T shape available in three heights 60, 90 or 120 cm. Calib has a diffused light emission obtained via an opal polycarbonate screen, with a power of up to 16 W. Ideal for lighting paths and access roads, it is a robust device thanks to treatment of the wooden body through acetylation resistant to water and wear and tear.

**IT** La perfezione della luce in una forma a T disponibile in tre altezze: 60, 90 o 120 cm. Calib ha un'emissione luminosa diffusa ottenuta tramite uno schermo in policarbonato opale, con una potenza fino a 16 W. Ideale per l'illuminazione di camminamenti e viali d'accesso, è un apparecchio robusto grazie al trattamento del corpo in legno tramite acetilazione resistente all'acqua e all'usura del tempo.

CE EAC








**BOLLARD**



Wattage	11 W
Voltage	220-240 Vac
Beam	

**TECHNICAL SPECIFICATIONS**

Source lamp	LED 11 W
Total wattage	16 W
Voltage	220-240 Vac, 50-60 Hz
Control	On/Off
Light colour	3000 K • other colours on request
Luminous flux (*Source flux)	1084 lm (1518 lm*)
Luminous efficacy	68 lm/W
McADAM steps	3
Beam	Diffuse
CRI	> 90
Life time	L70 > 50.000 h Ta 40°C
IP rating	IP 65
IK rating	IK 08
Insulation class	II

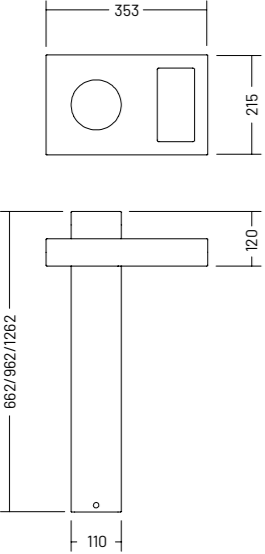

**MATERIALS**

Body	Accoya® wood and inox AISI 316L
Diffuser	Opal polycarbonate
Finishing	Acetylation treatment

**ORDER CODE**

**CA 90 \_\_\_ D H B 10 3**


Height	<b>060</b> 60 cm
	<b>090</b> 90 cm
	<b>120</b> 120 cm

Example **CA 90 060 D H B 10 3**

**INCLUDED ACCESSORIES**

Code	Description
-	Single connection IP68
-	Root mounting kit



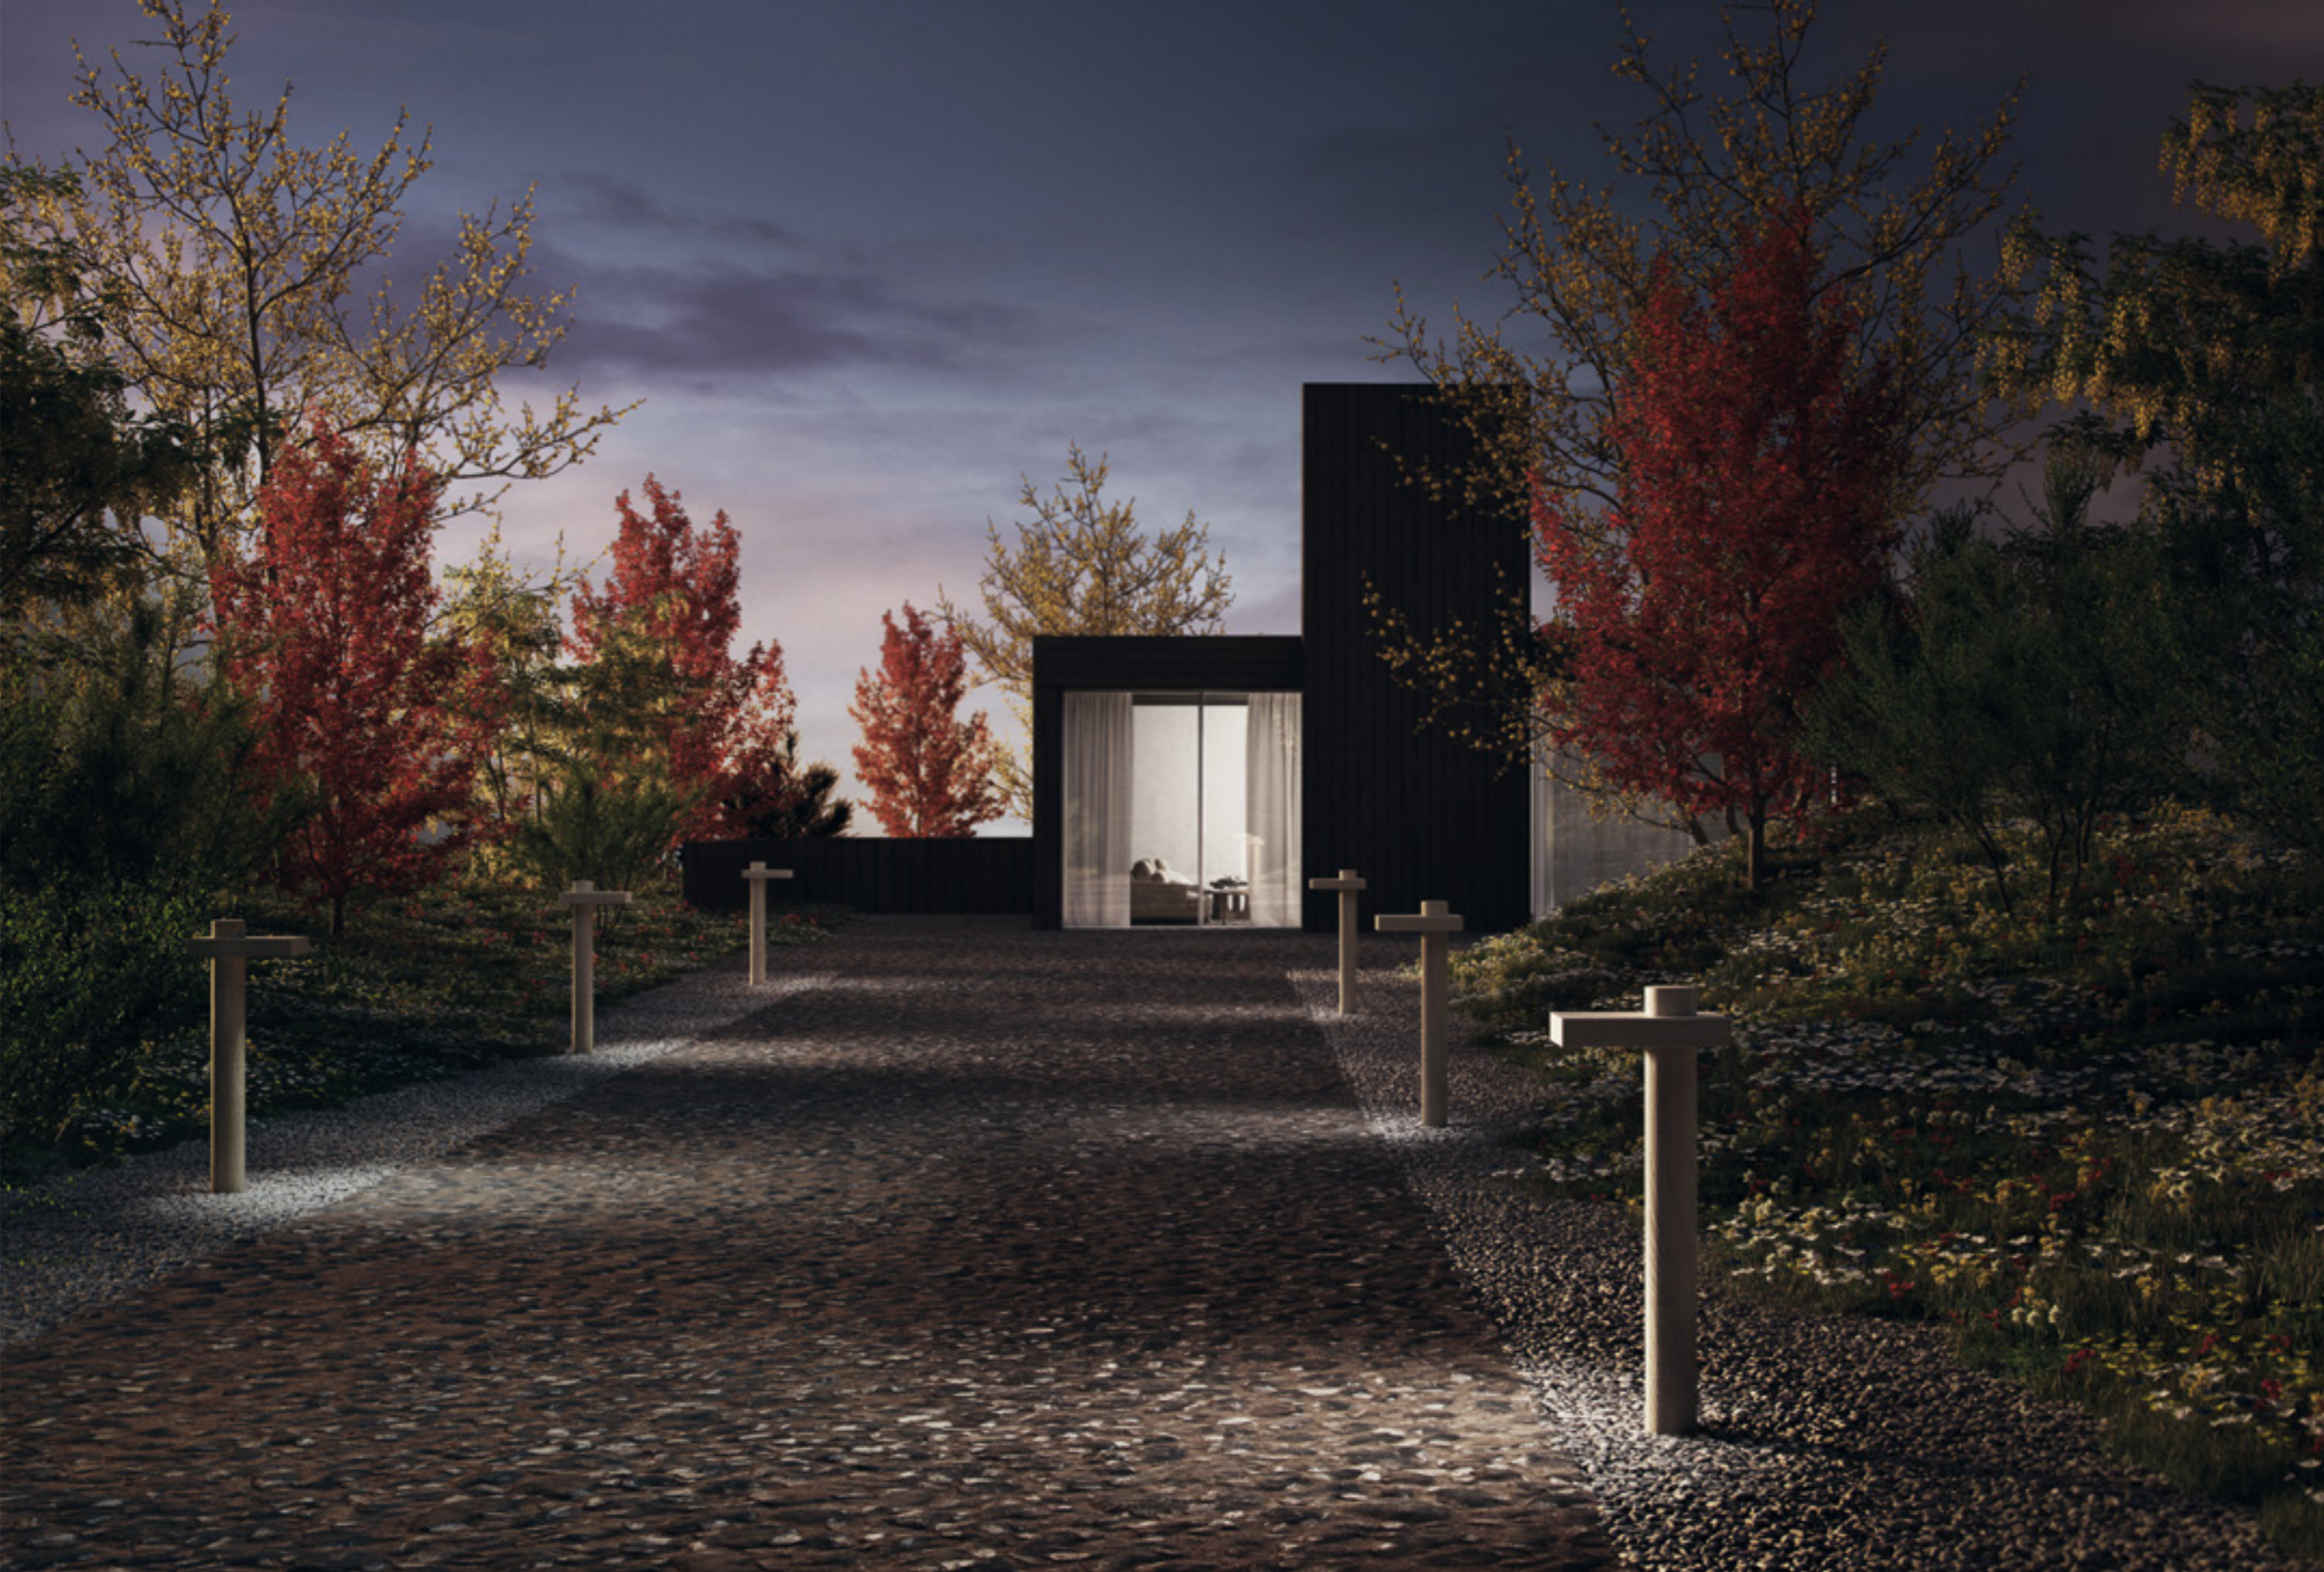



## EDEN OF LIGHT.

[EDEN DI LUCE.]



# duvali

Duvali, the lighting device for paths with a power of 1.5/2.5 W (Duvali\_mini) and 8 W (Duvali) has an evocative and elegant shape. A bollard made in Accoya® timber available with a height of 35, 60, 90 and 120 cm. Duvali is absolute three-dimensionality, solidity and perfect light distribution. No design limit and maximum possible resistance, thanks to the technical solutions adopted.

**IT** *Una forma evocativa ed elegante quella di Duvali, apparecchio illuminante da camminamento con potenza 1,5/2,5 W (Duvali\_mini) e 8 W (Duvali). Un bollard realizzato in legno di Accoya® disponibile con altezza 35, 60, 90 e 120 cm. Duvali è tridimensionalità assoluta, solidità e perfetta distribuzione luminosa. Nessun limite progettuale e massima resistenza possibile, grazie alle soluzioni tecniche adottate.*

CE EAC





# duvali\_mini


## BOLLARD



Wattage 1.5 W | 2.5 W

Voltage 24 Vdc | 220-240 Vac

Beam







### TECHNICAL SPECIFICATIONS

Source lamp	<u>LED 1.5 W</u>
Total wattage	<u>1.5 W</u>
Voltage	<u>24 Vdc</u>
Control	<u>On/Off</u>
Light colour	<u>3000 K • other colours on request</u>
Luminous flux (*Source flux)	<u>135 lm (250 lm*)</u>
Luminous efficacy	<u>44 lm/W</u>
McADAM steps	<u>3</u>
Beam	<u>Diffuse</u>
CRI	<u>&gt; 90</u>
Life time	<u>L70 &gt; 50.000 h Ta 40°C</u>
IP rating	<u>IP 65</u>
IK rating	<u>IK 08</u>
Insulation class	<u>III</u>

<b>DIFFUSE 1.5 W</b>
LED 1.5 W
1.5 W
24 Vdc
On/Off
3000 K • other colours on request
135 lm (250 lm*)
44 lm/W
3
Diffuse
> 90
L70 > 50.000 h Ta 40°C
IP 65
IK 08
III

<b>DIFFUSE 2.5 W</b>
LED 2.5 W
2.5 W
220-240 Vac, 50-60 Hz
On/Off
3000 K • other colours on request
117 lm (228 lm*)
48 lm/W
3
Diffuse
> 90
L70 > 50.000 h Ta 40°C
IP 65
IK 08
II



### MATERIALS

Body	<u>Accoya® wood and inox AISI 316L</u>
Diffuser	<u>Opal polycarbonate</u>
Finishing	<u>Acetylation treatment</u>

### ORDER CODE

<b>DV 4 0 035 D H B _ _ 3</b>	
	Voltage <u>7Z 24 Vdc</u>
	<u>10 220-240 Vac</u>
Example	<u>DV 4 0 035 D H B 7 Z 3</u>

### INCLUDED ACCESSORIES

Code	Description
-	<u>Single connection IP68</u>
-	<u>Root mounting kit</u>

### AVAILABLE ACCESSORIES

24 Vdc ONLY	
Code	Description
<b>0409BT014</b>	<u>Transformer _ 24Vdc - 12W (connect up to 2 pcs)</u>
<b>0409BT015</b>	<u>Transformer _ 24Vdc - 24W (connect up to 5 pcs)</u>
<b>0409BT016</b>	<u>Transformer _ 24Vdc - 100W (connect up to 20 pcs)</u>

**BOLLARD**



Wattage 5.5 W

Voltage 220-240 Vac

Beam

**TECHNICAL SPECIFICATIONS**

Source lamp	<u>LED 5.5 W</u>
Total wattage	<u>8 W</u>
Voltage	<u>220-240 Vac, 50-60 Hz</u>
Control	<u>On/Off</u>
Light colour	<u>3000 K • other colours on request</u>
Luminous flux (*Source flux)	<u>542 lm (759 lm*)</u>
Luminous efficacy	<u>68 lm/W</u>
McADAM steps	<u>3</u>
Beam	<u>Diffuse</u>
CRI	<u>&gt; 90</u>
Life time	<u>L70 &gt; 50.000 h Ta 40°C</u>
IP rating	<u>IP 65</u>
IK rating	<u>IK 08</u>
Insulation class	<u>II</u>

**DIFFUSE**

LED 5.5 W
8 W
220-240 Vac, 50-60 Hz
On/Off
3000 K • other colours on request
542 lm (759 lm*)
68 lm/W
3
Diffuse
> 90
L70 > 50.000 h Ta 40°C
IP 65
IK 08
II

**MATERIALS**

Body	<u>Accoya® wood and inox AISI 316L</u>
Diffuser	<u>Opal polycarbonate</u>
Finishing	<u>Acetylation treatment</u>

**ORDER CODE**




**DV 6 0**     **D H B 1 0 3**

Height	<u>060</u>	<u>60 cm</u>
	<u>090</u>	<u>90 cm</u>
	<u>120</u>	<u>120 cm</u>

Example DV 6 0 060 D H B 1 0 3

**INCLUDED ACCESSORIES**

Code	Description
-	<u>Single connection IP68</u>
-	<u>Root mounting kit</u>









## A HABITAT OF LIGHT.

[UN HABITAT DI LUCE.]





# idria


Idria is a range which can be integrated into any outdoor space. Both the bollard and the wall version have a power of 8 W, ideal for lighting paths and entrances in a decisive, scenic and evocative way. The products are made in Accoya® together with AISI 316L stainless steel and are characterised in both versions by a diffused light emission.

**IT** *Idria è una gamma integrabile in qualsiasi spazio esterno. Sia la versione bollard sia la versione da parete hanno una potenza di 8 W, l'ideale per illuminare percorsi ed ingressi in modo deciso, scenico ed evocativo. I prodotti sono realizzati in Accoya® unitamente all'acciaio inox AISI 316L e sono caratterizzati in entrambe le versioni da un'emissione luminosa diffusa.*

CE EAC



**WALL LAMP**



Wattage 5.5 W

Voltage 220-240 Vac

Beam

**TECHNICAL SPECIFICATIONS**

Source lamp	<u>LED 5.5 W</u>
Total wattage	<u>8 W</u>
Voltage	<u>220-240 Vac, 50-60 Hz</u>
Control	<u>On/Off</u>
Light colour	<u>3000 K • other colours on request</u>
Luminous flux (*Source flux)	<u>542 lm (759 lm*)</u>
Luminous efficacy	<u>68 lm/W</u>
McADAM steps	<u>3</u>
Beam	<u>Diffuse</u>
CRI	<u>&gt; 90</u>
Life time	<u>L70 &gt; 50.000 h Ta 40°C</u>
IP rating	<u>IP 65</u>
IK rating	<u>IK 08</u>
Insulation class	<u>II</u>

**DIFFUSE**

<u>LED 5.5 W</u>
<u>8 W</u>
<u>220-240 Vac, 50-60 Hz</u>
<u>On/Off</u>
<u>3000 K • other colours on request</u>
<u>542 lm (759 lm*)</u>
<u>68 lm/W</u>
<u>3</u>
<u>Diffuse</u>
<u>&gt; 90</u>
<u>L70 &gt; 50.000 h Ta 40°C</u>
<u>IP 65</u>
<u>IK 08</u>
<u>II</u>

**MATERIALS**




Body	<u>Accoya® wood and inox AISI 316L</u>
Diffuser	<u>Opal polycarbonate</u>
Finishing	<u>Acetylation treatment</u>

**ORDER CODE**

**ID 8 0 PAR D H B 10 3**

**INCLUDED ACCESSORIES**

Code	Description
-	<u>Single connection IP68</u>





## BOLLARD



Wattage 5.5 W

Voltage 220-240 Vac





Beam 

## TECHNICAL SPECIFICATIONS

Source lamp	LED 5.5 W
Total wattage	8 W
Voltage	220-240 Vac, 50-60 Hz
Control	On/Off
Light colour	3000 K • other colours on request
Luminous flux (*Source flux)	542 lm (759 lm*)
Luminous efficacy	68 lm/W
McADAM steps	3
Beam	Diffuse
CRI	> 90
Life time	L70 > 50.000 h Ta 40°C
IP rating	IP 65
IK rating	IK 08
Insulation class	II

## DIFFUSE

LED 5.5 W
8 W
220-240 Vac, 50-60 Hz
On/Off
3000 K • other colours on request
542 lm (759 lm*)
68 lm/W
3
Diffuse
> 90
L70 > 50.000 h Ta 40°C
IP 65
IK 08
II



## MATERIALS

Body	Accoya® wood and inox AISI 316L
Diffuser	Opal polycarbonate
Finishing	Acetylation treatment

## ORDER CODE

ID 8 0	DHB103	Height	060	60 cm
			090	90 cm
			120	120 cm

Example ID 8 0 060 DHB103

## INCLUDED ACCESSORIES

Code	Description
-	Single connection IP68
-	Root mounting kit







YOUR PRIVATE PLACE.

[IL TUO SPAZIO PRIVATO.]



# kalan

Kalan is a range of light lines: it has been designed to light outdoor areas such as terraces, verandas, porches and entrances through the versatility of being installed on the ceiling and on the wall. Simplicity and formal purity are pursued for an impactful lighting. Different lengths, different powers (8, 15 and 20 W) and 4 different wooden covers with mechanical fixture, make Kalan a minimal, refined solution.

**IT** *Kalan è una gamma di linee di luce: nasce per illuminare spazi outdoor come terrazze, verande, porticati, ingressi, attraverso la versatilità di essere installato a soffitto e a parete. Semplicità e purezza formale sono perseguite per un'illuminazione di effetto. Diverse lunghezze, diverse potenze (8, 15 e 20 W) e 4 differenti cover lignee con fissaggio meccanico, rendono Kalan una soluzione minimale e raffinata.*





# kalan 550

### CEILING LAMP

### WALL LAMP



example image with cover 2



example image with cover 2

### TECHNICAL SPECIFICATIONS

- Source lamp
- Total wattage
- Voltage
- Control
- Light colour
- Luminous flux (\*Source flux)
- Luminous efficacy
- McADAM steps
- Beam
- CRI
- Life time
- IP rating
- IK rating
- Insulation class

Wattage 8 W

Wattage 8 W

Voltage 220-240 Vac





Voltage 220-240 Vac

Beam

Beam

### DOUBLE DIFFUSE

- LED 8 W
- 10 W
- 220-240 Vac, 50-60 Hz
- On/Off
- 3000 K • other colours on request
- 210 lm (280 lm\*)
- 22 lm/W
- 3
- Diffuse (indirect)
- > 90
- L70 > 50.000 h Ta 40°C
- IP 65
- IK 08
- II

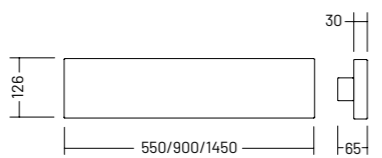

cover 1



cover 2



cover 3



cover 4

### MATERIALS

Body	Accoya® wood and inox AISI 316L
Diffuser	Opal polycarbonate
Finishing	Acetylation treatment

### ORDER CODE

**KL L 5 POS D H B 10 3**

Note: cover not included, must be ordered separately

### COVER

Code	Description
00COVKL05.01	cover 1
00COVKL05.02	cover 2
00COVKL05.03	cover 3
00COVKL05.04	cover 4

### INCLUDED ACCESSORIES

Code	Description
-	Single connection IP68

# kalan 900

### CEILING LAMP

### WALL LAMP



example image with cover 2



example image with cover 2

### TECHNICAL SPECIFICATIONS





- Source lamp
- Total wattage
- Voltage
- Control
- Light colour
- Luminous flux (\*Source flux)
- Luminous efficacy
- McADAM steps
- Beam
- CRI
- Life time
- IP rating
- IK rating
- Insulation class

**DOUBLE DIFFUSE**

LED 12 W
15 W
220-240 Vac, 50-60 Hz
On/Off
3000 K • other colours on request
320 lm (420 lm*)
22 lm/W
3
Diffuse (indirect)
> 90
L70 > 50.000 h Ta 40°C
IP 65
IK 08
II

Wattage	12 W
Voltage	220-240 Vac
Beam	

Wattage	12 W
Voltage	220-240 Vac
Beam	

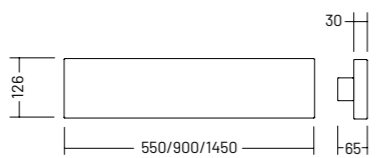

cover 1



cover 2



cover 3



cover 4

### MATERIALS

Body	Accoya® wood and inox AISI 316L
Diffuser	Opal polycarbonate
Finishing	Acetylation treatment

### ORDER CODE

**KL L 9 POS D H B 103**

Note: cover not included, must be ordered separately

### COVER

Code	Description
00COVKL09.01	cover 1
00COVKL09.02	cover 2
00COVKL09.03	cover 3
00COVKL09.04	cover 4

### INCLUDED ACCESSORIES

Code	Description
-	Single connection IP68



**CEILING LAMP**

**WALL LAMP**



example image with cover 2



example image with cover 2

**TECHNICAL SPECIFICATIONS**





- Source lamp
- Total wattage
- Voltage
- Control
- Light colour
- Luminous flux (\*Source flux)
- Luminous efficacy
- McADAM steps
- Beam
- CRI
- Life time
- IP rating
- IK rating
- Insulation class

**DOUBLE DIFFUSE**

LED 18 W
20 W
220-240 Vac, 50-60 Hz
On/Off
3000 K • other colours on request
476 lm (648 lm*)
24 lm/W
3
Diffuse (indirect)
> 90
L70 > 50.000 h Ta 40°C
IP 65
IK 08
II

Wattage	18 W
Voltage	220-240 Vac
Beam	

Wattage	18 W
Voltage	220-240 Vac
Beam	

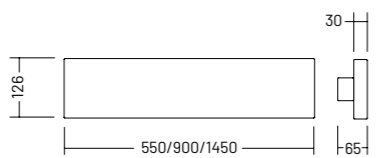

cover 1



cover 2



cover 3



cover 4

**MATERIALS**

Body	Accoya® wood and inox AISI 316L
Diffuser	Opal polycarbonate
Finishing	Acetylation treatment

**ORDER CODE**

**KL L 0 POS D H B 103**  
 Note: cover not included, must be ordered separately

**COVER**

Code	Description
00COVKL00.01	cover 1
00COVKL00.02	cover 2
00COVKL00.03	cover 3
00COVKL00.04	cover 4

**INCLUDED ACCESSORIES**

Code	Description
-	Single connection IP68





## ECOLOGICAL PASTORAL.

[PASTORALE ECOLOGICA.]



# solisia

With Solisia, [LND] has created an evocative and elegant range of products developed in two applications, bollard and wall-mounted, which dialogue in continuity with the outdoor environment.

The circle, the perfect paradigm of union, is the shape which makes the lighting device stand out. Light emission is diffused with the following available powers: 10/20 W (bollard) and 8/13 W (wall-mounted) and with an ecological Accoya® style. Solisia respects the outdoor environment in which it is installed.

**IT** Con Solisia, [LND] ha realizzato una gamma di prodotti evocativa ed elegante sviluppata in due applicazioni, bollard e parete, che dialogano in continuità con l'ambiente esterno.

Il cerchio, paradigma perfetto dell'unione, è la forma che contraddistingue l'apparecchio illuminante. L'emissione luminosa è diffusa, diverse le potenze disponibili: 10/20 W (bollard) e 8/13 W (parete) e uno stile Accoya® ecologico, Solisia rispetta l'outdoor in cui è inserito.

CE EAC





# solisia 130

**WALL LAMP**



Wattage 8 W

Voltage 24 Vdc

Beam

### TECHNICAL SPECIFICATIONS

Source lamp	<u>LED 8 W</u>
Total wattage	<u>8 W</u>
Voltage	<u>24 Vdc</u>
Control	<u>On/Off</u>
Light colour	<u>3000 K • other colours on request</u>
Luminous flux (*Source flux)	<u>470 lm (920 lm*)</u>
Luminous efficacy	<u>59 lm/W</u>
McADAM steps	<u>3</u>
Beam	<u>Diffuse (indirect)</u>
CRI	<u>&gt; 90</u>
Life time	<u>L70 &gt; 50.000 h Ta 40°C</u>
IP rating	<u>IP 65</u>
IK rating	<u>IK 08</u>
Insulation class	<u>III</u>

### DIFFUSE

<u>LED 8 W</u>
<u>8 W</u>
<u>24 Vdc</u>
<u>On/Off</u>
<u>3000 K • other colours on request</u>
<u>470 lm (920 lm*)</u>
<u>59 lm/W</u>
<u>3</u>
<u>Diffuse (indirect)</u>
<u>&gt; 90</u>
<u>L70 &gt; 50.000 h Ta 40°C</u>
<u>IP 65</u>
<u>IK 08</u>
<u>III</u>

### MATERIALS

Body	<u>Accoya® wood and inox AISI 316L</u>
Diffuser	<u>Opal polycarbonate</u>
Finishing	<u>Acetylation treatment</u>

### ORDER CODE




**S070PARDH B7Z3**

### INCLUDED ACCESSORIES

Code	Description
-	<u>Single connection IP68</u>

### AVAILABLE ACCESSORIES

Code	Description
<u>0409BT014</u>	<u>Transformer _ 24Vdc - 12W (connect up to 1 pcs)</u>
<u>0409BT015</u>	<u>Transformer _ 24Vdc - 24W (connect up to 2 pcs)</u>
<u>0409BT016</u>	<u>Transformer _ 24Vdc - 100W (connect up to 10 pcs)</u>









# solisia 130

**BOLLARD**



Wattage 8 W

Voltage 220-240 Vac

Beam

**TECHNICAL SPECIFICATIONS**

Source lamp	<u>LED 8 W</u>
Total wattage	<u>10 W</u>
Voltage	<u>220-240 Vac, 50-60 Hz</u>
Control	<u>On/Off</u>
Light colour	<u>3000 K • other colours on request</u>
Luminous flux (*Source flux)	<u>470 lm (920 lm*)</u>
Luminous efficacy	<u>47 lm/W</u>
McADAM steps	<u>3</u>
Beam	<u>Diffuse</u>
CRI	<u>&gt; 90</u>
Life time	<u>L70 &gt; 50.000 h Ta 40°C</u>
IP rating	<u>IP 65</u>
IK rating	<u>IK 08</u>
Insulation class	<u>II</u>

**DIFFUSE**

LED 8 W
10 W
220-240 Vac, 50-60 Hz
On/Off
3000 K • other colours on request
470 lm (920 lm*)
47 lm/W
3
Diffuse
> 90
L70 > 50.000 h Ta 40°C
IP 65
IK 08
II

**MATERIALS**

Body	<u>Accoya® wood and inox AISI 316L</u>
Diffuser	<u>Opal polycarbonate</u>
Finishing	<u>Acetylation treatment</u>

**ORDER CODE**





**S070 \_\_\_ DHB103**

Height	<u>035 35 cm</u>
	<u>055 55 cm</u>
	<u>085 85 cm</u>

Example S070 035 DHB103

**INCLUDED ACCESSORIES**

Code	Description
-	<u>Single connection IP68</u>
-	<u>Root mounting kit</u>









# solisia 200

**WALL LAMP**



Wattage 13 W

Voltage 24 Vdc




Beam

### TECHNICAL SPECIFICATIONS

Source lamp	<u>LED 13 W</u>
Total wattage	<u>13 W</u>
Voltage	<u>24 Vdc</u>
Control	<u>On/Off</u>
Light colour	<u>3000 K • other colours on request</u>
Luminous flux (*Source flux)	<u>1098 lm (1831 lm*)</u>
Luminous efficacy	<u>84 lm/W</u>
McADAM steps	<u>3</u>
Beam	<u>Diffuse (indirect)</u>
CRI	<u>&gt; 90</u>
Life time	<u>L70 &gt; 50.000 h Ta 40°C</u>
IP rating	<u>IP 65</u>
IK rating	<u>IK 08</u>
Insulation class	<u>III</u>

### DIFFUSE

<u>LED 13 W</u>
<u>13 W</u>
<u>24 Vdc</u>
<u>On/Off</u>
<u>3000 K • other colours on request</u>
<u>1098 lm (1831 lm*)</u>
<u>84 lm/W</u>
<u>3</u>
<u>Diffuse (indirect)</u>
<u>&gt; 90</u>
<u>L70 &gt; 50.000 h Ta 40°C</u>
<u>IP 65</u>
<u>IK 08</u>
<u>III</u>



### MATERIALS

Body	<u>Accoya® wood and inox AISI 316L</u>
Diffuser	<u>Opal polycarbonate</u>
Finishing	<u>Acetylation treatment</u>

### ORDER CODE

**S080PARDHB7Z3**

### INCLUDED ACCESSORIES

Code	Description
-	<u>Single connection IP68</u>

### AVAILABLE ACCESSORIES

Code	Description
<b>0409BT015</b>	<u>Transformer _ 24Vdc - 24W (connect up to 1 pcs)</u>
<b>0409BT016</b>	<u>Transformer _ 24Vdc - 100W (connect up to 6 pcs)</u>

# solisia 200

**BOLLARD**



Wattage 13 W

Voltage 220-240 Vac

Beam

**TECHNICAL SPECIFICATIONS**

Source lamp	<u>LED 13 W</u>
Total wattage	<u>20 W</u>
Voltage	<u>220-240 Vac, 50-60 Hz</u>
Control	<u>On/Off</u>
Light colour	<u>3000 K • other colours on request</u>
Luminous flux (*Source flux)	<u>1098 lm (1831 lm*)</u>
Luminous efficacy	<u>55 lm/W</u>
McADAM steps	<u>3</u>
Beam	<u>Diffuse</u>
CRI	<u>&gt; 90</u>
Life time	<u>L70 &gt; 50.000 h Ta 40°C</u>
IP rating	<u>IP 65</u>
IK rating	<u>IK 08</u>
Insulation class	<u>II</u>

**DIFFUSE**

LED 13 W
20 W
220-240 Vac, 50-60 Hz
On/Off
3000 K • other colours on request
1098 lm (1831 lm*)
55 lm/W
3
Diffuse
> 90
L70 > 50.000 h Ta 40°C
IP 65
IK 08
II

**MATERIALS**

Body	<u>Accoya® wood and inox AISI 316L</u>
Diffuser	<u>Opal polycarbonate</u>
Finishing	<u>Acetylation treatment</u>

**ORDER CODE**





**S080\_\_\_DHB103**

Height	<u>035 35 cm</u>
	<u>055 55 cm</u>
	<u>085 85 cm</u>

Example S080035DHB103

**INCLUDED ACCESSORIES**

Code	Description
-	<u>Single connection IP68</u>
-	<u>Root mounting kit</u>







zygo

design by Landa R&D

A URBAN & BUCOLIC DREAM.

[UN SOGNO URBANO E BUCOLICO.]



CE ENEC



zygo

All the traditional look in the shape and the most complete and advanced proposal of materials and technical-lighting technology in Zygo: the classic transported into modernity for a bollard available with a height of 60 cm.

A diffused light emission together with a power of 8 W make this device ideal for lighting paths, access roads and gardens.

**IT** *Tutta l'estetica tradizionale nella forma e la proposta più completa e avanzata di materiali e tecnologia illuminotecnica in Zygo: il classico trasportato nella contemporaneità per un bollard disponibile con un'altezza pari a 60 cm. Un'emissione luminosa diffusa unitamente ad un potenza di 8 W rendono questo apparecchio ideale per illuminare camminamenti, vialetti d'accesso, giardini.*

CE EAC



**BOLLARD**



Wattage 5.5 W

Voltage 220-240 Vac

Beam

**TECHNICAL SPECIFICATIONS**

Source lamp	<u>LED 5.5 W</u>
Total wattage	<u>8 W</u>
Voltage	<u>220-240 Vac, 50-60 Hz</u>
Control	<u>On/Off</u>
Light colour	<u>3000 K • other colours on request</u>
Luminous flux (*Source flux)	<u>542 lm (759 lm*)</u>
Luminous efficacy	<u>68 lm/W</u>
McADAM steps	<u>3</u>
Beam	<u>Diffuse</u>
CRI	<u>&gt; 90</u>
Life time	<u>L70 &gt; 50.000 h Ta 40°C</u>
IP rating	<u>IP 65</u>
IK rating	<u>IK 08</u>
Insulation class	<u>II</u>

**DIFFUSE**

LED 5.5 W
8 W
220-240 Vac, 50-60 Hz
On/Off
3000 K • other colours on request
542 lm (759 lm*)
68 lm/W
3
Diffuse
> 90
L70 > 50.000 h Ta 40°C
IP 65
IK 08
II

**MATERIALS**





Body	<u>Accoya® wood and inox AISI 316L</u>
Diffuser	<u>Opal polycarbonate</u>
Finishing	<u>Acetylation treatment</u>

**ORDER CODE**

**ZY 5 0 060 D H B 10 3**

**INCLUDED ACCESSORIES**

Code	Description
-	<u>Single connection IP68</u>
-	<u>Root mounting kit</u>









INFORMATION



# how to read the catalogue

product name  
nome prodotto

26 **calib** 27

La perfezione della luce in una forma a T disponibile in tre altezze: 60, 90 o 120 cm. Calib ha un'emissione luminosa diffusa ottenuta tramite uno schermo in policarbonato opale, con una potenza fino a 16 W. Ideale per illuminazione di camminamenti e viali d'accesso. È un apparecchio robusto grazie al trattamento del corpo in legno tramite acetilazione resistente all'acqua e all'usura del tempo.

17. La perfezione della luce in una forma a T disponibile in tre altezze: 60, 90 o 120 cm. Calib ha un'emissione luminosa diffusa ottenuta tramite uno schermo in policarbonato opale, con una potenza fino a 16 W. Ideale per illuminazione di camminamenti e viali d'accesso. È un apparecchio robusto grazie al trattamento del corpo in legno tramite acetilazione resistente all'acqua e all'usura del tempo.

CE ENEC

www.landa.it

LANDA



certifications  
certificazioni

product description  
descrizione prodotto

product name  
nome prodotto

mounting  
applicazione

28 **calib** 29

**TECHNICAL SPECIFICATIONS**

Source type	LED 11 W
Total wattage	16 W
Voltage	220-240 Vac, 50-60 Hz
Control	ON/OFF
Light colour	3000 K - other colours on request
Luminous flux (2300K)	1280 lm (808 lm*)
Luminous efficacy	88 lm/W
Power factor	0.9
Beam	Ø100mm
IP	IP20
Life time	L70 > 50,000 h Ta=25°C
Finishing	Ø160
Mounting	Ø100
Installation class	0

**OFFICE**

LED 11 W  
16 W  
220-240 Vac, 50-60 Hz  
ON/OFF  
3000 K - other colours on request  
1280 lm (808 lm\*)  
88 lm/W  
0.9  
Ø100mm  
IP20  
L70 > 50,000 h Ta=25°C  
Ø160  
Ø100  
0

**MATERIALS**

Body: Acetyl wood and steel Ø100  
Diffuser: Opal polycarbonate  
Finishing: Acetone treatment

**ORDER CODE**

**CLIB...DWB103**

Height: 60 cm  
Ø100 mm  
Ø160 mm


Example: CLIB060DWB103

**INCLUDED ACCESSORIES**

Ø100mm  
Single connection PSM  
Fast mounting kit

www.landa.it

LANDA

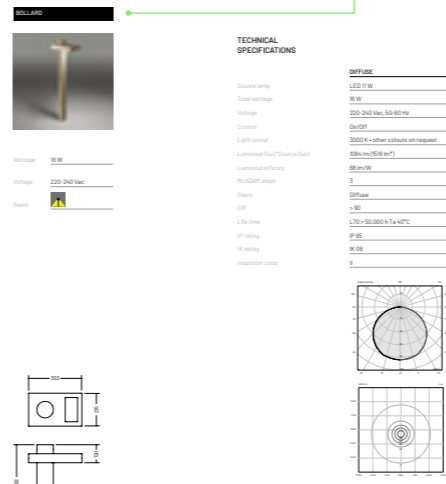

drawing quoted in mm  
disegno quotato in mm

technical information  
informazioni tecniche

# family abacus

	WALL LAMPS	CEILING LAMPS	BOLLARDS
calib			•
duvali			•
idria	•		•
kalan	•	•	
solisia	•		•
zygo			•

# index by code

29	CA 9 0	calib	bollard
37	DV 4 0	duvali_mini	bollard
39	DV 6 0	duvali	bollard
47	ID 8 0	idria	wall lamp
49	ID 8 0	idria	bollard
61	KL L 0	kalan 1450	wall lamp   ceiling lamp
57	KL L 5	kalan 550	wall lamp   ceiling lamp
59	KL L 9	kalan 900	wall lamp   ceiling lamp
69	SO 7 0	solisia 130	wall lamp
73	SO 7 0	solisia 130	bollard
77	SO 8 0	solisia 200	wall lamp
79	SO 8 0	solisia 200	bollard
87	ZY 5 0	zygo	bollard

# general information

### PROTECTION GRADE GRADO DI PROTEZIONE

**IP 65**

Luminaire dust-tight and protected against water jets.  
*Apparecchio stagno alla polvere e protetto da getti di acqua.*

### RESISTANCE TO CRASHES RESISTENZA AGLI URTI

**IK 08**

Luminaire protected against an impact energy of 5 Joules.  
*Apparecchio protetto contro un'energia d'impatto di 5 Joule.*

### INSULATION CLASS CLASSE DI ISOLAMENTO

**CLASS II**

Luminaire with double insulation. Protection: through additional insulation.  
*Apparecchio dotato di doppio isolamento. Protezione: mediante isolamento supplementare.*

**CLASS III**

Luminaire suitable for supply at safety extra low voltage. Protection: intrinsically safe. The live parts can be accessed.  
*Apparecchio idoneo per alimentazione a bassissima tensione di sicurezza. Protezione: intrinsecamente sicuro. Le parti che portano corrente possono essere accessibili.*

# symbols

### DIFFUSE BEAM EMISSIONE DIFFUSA



### DOUBLE DIFFUSE BEAM EMISSIONE DOPPIA DIFFUSA





# quality certifications

CE

CE

Indicates that the product is certified according to European standards  
*Indica che il prodotto è certificato secondo le norme europee*

EAC

EAC

Indicates that the product conforms to all technical regulations of the evaluation procedures of the Eurasian Customs Union  
*Indica che il prodotto si adegua a tutte le normative tecniche delle procedure di valutazione dell'Unione doganale eurasiatica*

# terms & conditions

## GENERAL

*Buyer means the person, firm or company who purchases Goods from the company.  
Company means Landa Illuminotecnica S.p.A. via Rosmini 13/15, 25065 Lumezzane (BS), Italy.  
Contract means the Contract between the Buyer and the Company for the sale and purchase of Goods.  
Goods means the Goods which the Company is to supply in accordance with these conditions.*

## BASIC OF SALE

*The Company shall sell and the Buyer shall purchase the Goods in accordance with these conditions, which shall govern the Contract to the exclusion of any other terms and conditions which the Buyer purports to apply under any purchase order, confirmation order, specification or other document.  
No variation to these conditions shall be binding unless agreed in writing by the Company.  
Any typographical, clerical or other error or omission in any sales literature, quotation, price list, acceptance of offer, invoice or other document or information issued by the Company shall be subject to correction without liability on the part of the Company.  
Goods supplied may vary in detail from illustrations, drawings, measurements and descriptions set out in the Company sales literature, which are approximate and for guidance only and will not form part of the Contract. Colour finishes will be maintained as accurately as possible but matching cannot be guaranteed. All terminology used in the Company's sales literature is subject to these conditions.*

## ORDERS

*No order submitted by the Buyer shall be deemed to be accepted by the Company unless and until confirmed in writing by the Company. The Buyer shall be responsible to the Company for ensuring the accuracy of the terms of any order submitted by the Buyer, and for giving the Company any necessary information relating to the Goods within a sufficient time to enable the Company to perform the Contract in accordance with its terms.  
No Goods may be returned to the Company without the Company's prior written consent and must be returned in their original packaging to ensure no damage is sustained during transit. The Buyer shall be liable for the cost of returning the Goods and for any damage to the Goods prior to receipt by the Company of such returned Goods.*

## PRICE OF GOODS

*The price of the Goods shall be the price listed in the Company's published price list in EURO currency.  
Unless otherwise agreed in writing between the Buyer and the Company, all prices are given by the Company on an ex-works basis, and where the Company agrees to deliver the Goods otherwise than at the Company's premises. The Buyer shall be liable to pay the Company's charges for transport.*

## WARRANTIES

*Outdoor lighting fixtures are guaranteed against defects in material or workmanship for a period of two years following the date of delivery ex-works.  
No warranty is granted in connection with faults resulting from improper use, application, normal wear and tear, external influences or use of non-original replacement parts, damage resulting from transportation.  
The Company recommends that the installation of outdoor lighting fixtures is made by a skilful person and that the enclosed assembly instructions are followed and kept for further future maintenance.  
The Company will not assume responsibility for corrosion or other resulting damage to the Goods where they are installed in areas in which fertilizer or salt are present, either in the air or in the soil or where Goods are installed near to chemical plants etc with emissions of heavily polluted air.  
The Buyer undertakes to inform his customers about the regular maintenance of the products. In particular for the products in stainless steel AISI 316, by means of the technical sheets included in his catalogue, the distributor will inform his customer regarding the specific products (among which also those available from the Company aimed to remove possible colour spots) liable to keep the features of the products unaltered. Claims should be promptly submitted in a written form to the Company together with copy of the purchase invoice and stating the delivery date, description of the faults and quantity of faulty products. Products that are proved to be defective in material or workmanship will be repaired, replaced by the Company within a reasonable period after the claim. Returns of faulty Goods will be accepted by the Company only upon written authorization, adequately despatched and packed with transport prepaid. Extra costs borne by the Buyer in consequence of the faults of the products will not be carried by the Company, if not previously agreed in written form.  
The Company will not assume any responsibility in the following cases:  
improper assembly, use or maintenance of the products and their incorrect conservation.  
This guarantee shall not apply to products that have been altered, improperly used or installed or repaired without prior written authorization from the Company. If quality and performance have become less due to the application of accessories not approved by the Company. This guarantee deletes and replaces any other further responsibility arising from the products supplied; in particular the Buyer shall have no right to claim for damages reimbursement (indirect or consequent damages included or profit losses) reduction of prices or resolution of the Contract.*

LANDA®

Art Direction: Stefano Dall'Osso - SPLD  
Technical: Landa S.p.A.  
Photos: F16 Studio  
Rendering: Andrea Zani  
Concept & Graphic Design: ASB\COMUNICAZIONE  
Print: ColorArt

Landa Illuminotecnica S.p.A. reserves itself the faculty to change or to modify, without advance notice, the dimensions and the technical characteristics of the products indicated in this catalogue, due to operative necessities to improve the functionality or updating with law regulation.

*Landa Illuminotecnica S.p.A. si riserva la facoltà di variare o modificare, senza preavviso, le dimensioni e le caratteristiche tecniche dei prodotti indicati in questo catalogo in funzione delle necessità operative, per migliorarne la funzionalità o in adeguamento a normativa di legge.*



